

# G-100/100L

## Thin-walled Glass Capillary

### Ultrasonic cleaned thin-walled glass capillary.


This thin-walled glass capillary has been prewashed in an ultrasonic washing machine. The smaller outer diameter in thin-walled glass capillary helps to diminish damage to cells. G-100 (length 90mm) is suitable for use with puller PC-100. G-100L (length 100mm) is suitable particularly for making injection pipette or holding pipette with use of symmetrical puller.



# G-100/100L

Thin-walled Glass Capillary

## Comparison between Normal and Thin-walled Glass Capillaries

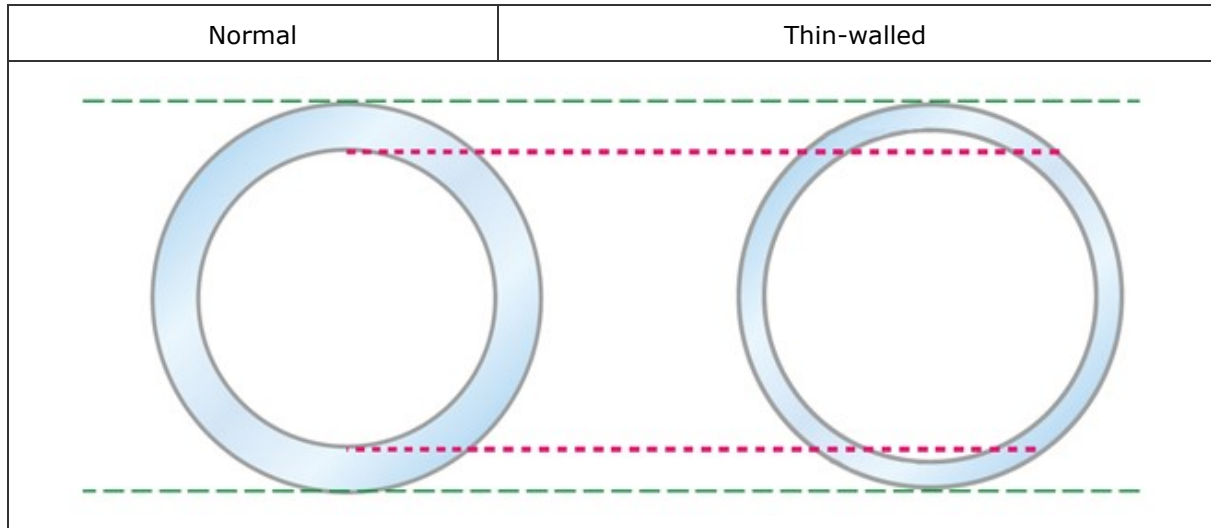

# G-100/100L

## Thin-walled Glass Capillary

### Specification

Type	<u>G-1</u>	<u>G-1.2</u>	<u>G-1.5</u>	<u>G-2</u>	<u>G-3</u>	<u>GD-1</u>	<u>GD-1.2</u>	<u>GD-1.5</u>	<u>GD-2</u>
<b>Outer diameter (mm)</b>	1	1.2	1.5	2	3	1	1.2	1.5	2
<b>Inner diameter (approx. mm)</b>	0.6	0.75	0.9	0.8	1.8	0.6	0.75	0.9	1.2
<b>Length (mm)</b>	90*	90*	90*	90*	90	90*	90*	90*	90*
<b>Contents (pcs)</b>	500	500	500	200	200	500	500	500	200
<b>Material</b>	Borosilicate								

Type	<u>GC-1</u>	<u>GC-1.2</u>	<u>GC-1.5</u>	<u>GDC-1</u>	<u>GDC-1.2</u>	<u>GDC-1.5</u>	<u>G-100</u>	<u>G-100L</u>	<u>G-1000</u>
<b>Outer diameter (mm)</b>	1	1.2	1.5	1	1.2	1.5	1	1	1
<b>Inner diameter (approx. mm)</b>	0.6	0.75	0.9	0.6	0.75	0.9	0.75	0.75	-
<b>Length (mm)</b>	90	90	90	90	90	90	90*	100*	90*
<b>Contents (pcs)</b>	200	200	200	200	200	200	500	500	200
<b>Material</b>	Borosilicate								

\* A custom length between 70mm and 180mm is also available by special order.

Specifications are subject to change without notice.

Copyright © NARISHIGE Group. All Rights Reserved. 1999-2019